




钨钢焊接刀片-D2型

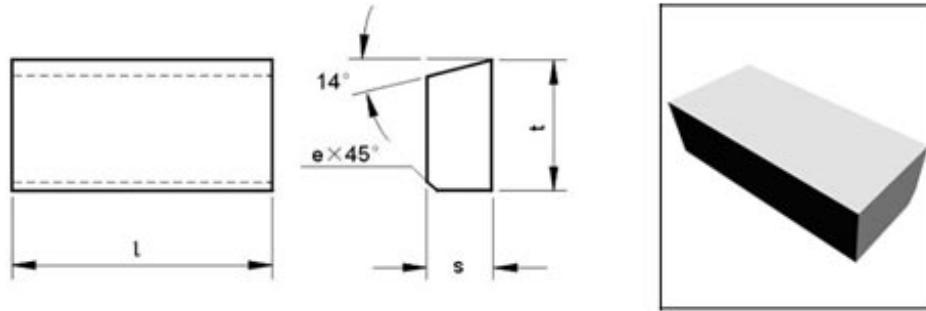

单位: mm

代号	L	t	s	e
CTC-GD206	6.0	7.0	3.0	/
CTC-GD208	8.0	4.0	3.0	/
CTC-GD210	10.0	5.0	3.0	/
CTC-GD210A	10.0	10.0	3.0	/
CTC-GD212	12.0	6.0	3.0	/
CTC-GD212A	12.0	12.0	3.5	0.8
CTC-GD214	14.0	7.0	3.5	0.8
CTC-GD214A	14.0	12.0	3.5	0.8
CTC-GD216	16.0	7.0	3.5	0.8
CTC-GD216A	16.0	12.0	3.5	0.8
CTC-GD218	18.0	5.0	3.0	/
CTC-GD218A	18.0	7.0	3.5	0.8
CTC-GD218B	18.0	12.0	3.5	0.8
CTC-GD220	20.0	10.0	4.0	0.8
CTC-GD222	22.0	6.0	3.0	/
CTC-GD222A	22.0	14.0	4.0	0.8
CTC-GD224	24.0	14.0	4.0	0.8
CTC-GD226	26.0	10.0	5.0	0.8
CTC-GD226A	26.0	14.0	5.0	0.8
CTC-G228	28.0	10.0	4.0	0.8
CTC-GD228A	28.0	14.0	4.0	0.8
CTC-GD230	30.0	14.0	5.0	0.8
CTC-GD232	32.0	12.0	5.0	0.8
CTC-GD232A	32.0	14.0	4.0	0.8
CTC-GD236	36.0	14.0	4.0	0.8
CTC-GD238	38.0	12.0	5.0	0.8
CTC-GD240	40.0	14.0	5.0	0.8
CTC-GD246	46.0	14.0	5.0	0.8

根据尺寸范围不同, 刀片毛坯平面度 ≤ 0.40 , 其他尺寸公差为 ± 1.3 ,

两支持侧面的连接半径 r 公差为 $-1.60 \sim 0$, 详情请咨询。