





## 钨钢焊接刀片-E7型

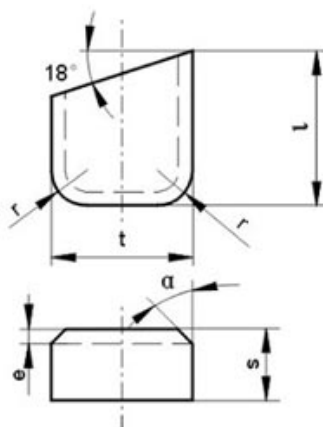

单位: mm

| 代号         | L    | t    | s   | r   | e   | $\alpha$ |
|------------|------|------|-----|-----|-----|----------|
| CTC-GE706  | 6.0  | 5.0  | 3.5 | 2.0 | 0.5 | 45°      |
| CTC-GE707  | 7.0  | 5.0  | 3.5 | 2.0 | 0   | 0°       |
| CTC-GE707A | 7.5  | 6.0  | 5.0 | 1.0 | 0   | 0°       |
| CTC-GE707B | 7.0  | 7.5  | 5.0 | 2.0 | 1.0 | 45°      |
| CTC-GE708  | 8.0  | 5.5  | 3.5 | 2.0 | 0   | 0°       |
| CTC-GE708A | 8.0  | 7.0  | 4.0 | 2.0 | 0   | 0°       |
| CTC-GE709  | 9.0  | 9.0  | 4.0 | 2.0 | 0   | 0°       |
| CTC-GE710  | 10.0 | 8.0  | 5.0 | 1.0 | 0   | 0°       |
| CTC-GE711  | 11.0 | 10.0 | 5.0 | 2.0 | 1.0 | 30°      |
| CTC-GE713  | 13.0 | 13.0 | 5.0 | 2.0 | 0   | 0°       |
| CTC-GE715  | 15.0 | 14.0 | 5.0 | 2.0 | 0   | 0°       |
| CTC-GE716  | 16.0 | 14.0 | 5.0 | 2.5 | 0   | 0°       |
| CTC-GE716A | 16.0 | 15.0 | 5.0 | 2.5 | 0   | 0°       |

根据尺寸范围不同, 刀片毛坯平面度 $\leq 0.40$ , 其他尺寸公差为 $\pm 1.3$ ,  
两支持侧面的连接半径r公差为-1.60~0, 详情请咨询。