




圆型缩杆模毛坯

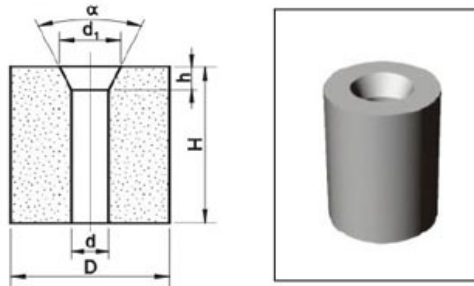

单位: mm

代号	d	D	H	d1	h	α
CTC-GΦ2×Φ10×15	2	10	15	4	/	30
CTC-GΦ2.1×Φ12×15	2.1	12	15	2.8	/	40
CTC-GΦ3×Φ10×15	3	10	15	5	/	30
CTC-GΦ3×Φ13×18	3	13	18	6	/	30
CTC-GΦ3.7×Φ26×13	3.7	26	13	4.6	/	20
CTC-GΦ4×Φ10×15	4	10	15	6.5	/	30
CTC-GΦ4.2×Φ12×10	4.2	12	10	5.5	/	22
CTC-GΦ4.5×Φ20×10	4.5	20	10	6.2	/	24
CTC-GΦ4.5×Φ26×13	4.5	26	13	5.8	/	20
CTC-GΦ5×Φ13×25	5	13	25	7.5	/	30
CTC-GΦ5.5×Φ14×21	5.5	14	21	/	6	41
CTC-GΦ6.5×Φ20×10	6.5	20	10	8.2	/	24
CTC-GΦ6.5×Φ26×13	6.5	26	13	7.8	/	20
CTC-GΦ6.5×Φ27×25	6.5	27	25	10	/	30
CTC-GΦ6.7×Φ30×31	6.7	30	31	/	1.3	10
CTC-GΦ6.7×Φ30×41	6.7	30	41	/	1.3	10
CTC-GΦ8×Φ30×10	8	30	10	9.7	/	24
CTC-GΦ8.2×Φ14×16	8.2	14	16	12	/	24
CTC-GΦ8.3×Φ16×9	8.3	16	9	9.8	2.4	/
CTC-GΦ8.5×Φ27×25	8.5	27	25	13	/	30
CTC-GΦ8.5×Φ30×37	8.5	30	37	/	1.5	10
CTC-GΦ8.9×Φ30×21	8.9	30	21	/	8	18
CTC-GΦ10×Φ30×14	10	30	14	11.7	/	24
CTC-GΦ10×Φ36×21	10	36	21	11.6	/	20
CTC-GΦ10×Φ36×21	10	36	21	11.6	/	20
CTC-GΦ10.3×Φ30×42	10.3	30	42	/	1.8	10
CTC-GΦ10.3×Φ30×51	10.3	30	51	/	1.8	10
CTC-GΦ10.5×Φ27×35	10.5	27	35	15.5	/	30
CTC-GΦ10.7×Φ30×21	10.7	30	21	/	8.8	18
CTC-GΦ11×Φ29.5×12	11	29.5	12	13	4	/
CTC-GΦ12×Φ35×14	12	35	14	13.7	/	24



续表

单位: mm

代号	d	D	H	d1	h	a
CTC-GΦ12.2×Φ40×47	12.2	40	47	/	2.1	10
CTC-GΦ12.2×Φ40×56	12.2	40	56	/	2.1	10
CTC-GΦ13.8×Φ36×21	13.8	36	21	15.6	/	20
CTC-GΦ14×Φ40×14	14	40	14	15.7	/	24
CTC-GΦ14.2×Φ40×52	14.2	40	52	/	2.1	10
CTC-GΦ14.5×Φ32×35	14.5	32	35	19.5	/	30
CTC-GΦ14.5×Φ35×25	14.5	35	25	/	11	18
CTC-GΦ15.4×Φ31.5×19	15.4	31.5	19	/	1	50
CTC-GΦ15.5×Φ40×20	15.5	40	20	17.6	/	24
CTC-GΦ17.5×Φ45×20	17.5	45	20	19.6	/	24
CTC-GΦ18.2×Φ35×25	18.2	35	25	/	11	18
CTC-GΦ18.4×Φ31.5×19	18.4	31.5	19	/	1	50
CTC-GΦ19.5×Φ45×20	19.5	45	20	21.6	/	24
CTC-GΦ20.2×Φ50×25	20.2	50	25	/	11	18
CTC-GΦ21×Φ50×20	21	50	20	23.1	/	24
CTC-GΦ24×Φ50×25	24	50	25	26.1	/	24
CTC-GΦ26×Φ50×85	26	50	85	/	6	24
CTC-GΦ26.5×Φ60×25	26.5	60	25	28.6	/	20
CTC-GΦ32×Φ70×25	32	70	25	34.1	/	24

根据尺寸范围不同, 模具毛坯内径公差为-2.0~0, 弯曲度要求不大于0.55, 外径、高度公差为-1.3~+1.4, 详情请咨询。