




12型 拉制黑色金属线材、棒材模坯

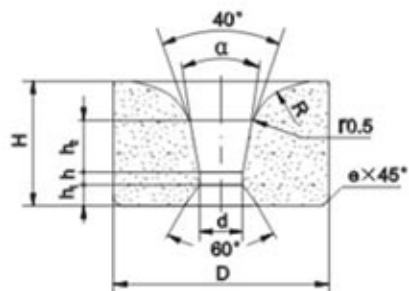

单位: mm

代号	D	H	d	h	h1	h2	R	α	e	
CTC-G12-0080610-0.4	8	6	0.4	0.3	1	1.4				
CTC-G12-0080610-0.6			0.6	0.4		1.6				
CTC-G12-0080610-0.8			0.8	0.6		1.8				
CTC-G12-0130810-0.4	13	8	0.4	0.3	1.5	2.0	2.0	10°	0.5	
CTC-G12-0130810-0.6			0.5	0.8						2.5
CTC-G12-0130810-0.8										
CTC-G12-0130810-1.0			1.0	0.6		3.0				
CTC-G12-0130810-1.3			1.3	0.8						
CTC-G12-0130810-1.8			1.8							
CTC-G12-0130810-2.3			2.3	1.0						
CTC-G12-0161012-0.8	16	10	0.8	0.5	2.0	2.5		12°		
CTC-G12-0161012-1.0			1.0	0.6						3.0
CTC-G12-0161012-1.3			1.3							
CTC-G12-0161012-1.8			1.8	1.0		3.5				
CTC-G12-0161012-2.3			2.3							
CTC-G12-0161012-2.8			2.8	1.2						
CTC-G12-0201214-2.3	20	12	2.3	1	2.5	4.5	3.0	14°	1.0	
CTC-G12-0201214-2.8			2.8	1.2						
CTC-G12-0201214-3.3			3.3	1.4		5.0				
CTC-G12-0201214-3.8			3.8							
CTC-G12-0221416-4.2	22	14	4.2	1.6	3.0	5.5		16°		
CTC-G12-0221416-4.7			4.7			7.0				
CTC-G12-0221416-5.2			5.2	2.0						
CTC-G12-0221416-5.7			5.7							
CTC-G12-0261616-6.4	26	16	6.4	2.0	3.5	7.5	3.5			
CTC-G12-0261616-7.2			7.2							
CTC-G12-0261616-8.0			8.0							

拉伸模毛坯公差参照Q/ZYH106-2000执行。