




六方螺母模毛坯

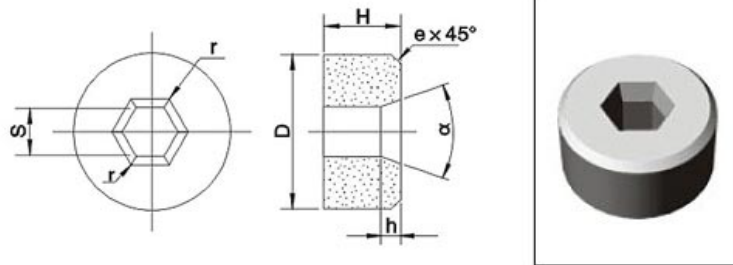

单位: mm

代号	S	D	H	h	e	a	r
CTC-G7.5×Φ25×20	7.5	25	20	2	2	30	0.5
CTC-G9.2×Φ25.5×9	9.2	25.5	9	1.5	1.5	60	0.5
CTC-G9.52×Φ30×20	9.52	30	20	2	2	30	0.5
CTC-G11×Φ30.5×8.5	11	30.5	8.5	1	1	90	0.2
CTC-G11.65×Φ25.5×9	11.65	25.5	9	1.5	1	80	0.4
CTC-G11.75×Φ30×20	11.75	30	20	2	2	30	0.5
CTC-G11.95×Φ30.5×11.2	11.95	30.5	11.2	1.5	1	60	0.4
CTC-G12.2×Φ30.5×10.5	12.2	30.5	10.5	1	1	90	0.2
CTC-G12.5×Φ30×20	12.5	30	20	2	2	30	0.5
CTC-G13×Φ30.5×11.2	13	30.5	11.2	1	1	60	0.4
CTC-G13.4×Φ30.5×12.2	13.4	30.5	12.2	1	1	60	0.4
CTC-G13.6×Φ30×20	13.6	30	20	2	2	30	0.5
CTC-G14×Φ35.5×11.3	14	35.5	11.3	1.5	1	90	0.2
CTC-G15.2×Φ35.5×12.5	15.2	35.5	12.5	1.5	1	90	0.2
CTC-G16.2×Φ35.5×11.8	16.2	35.5	11.8	1.5	1.5	60	0.5
CTC-G17.2×Φ34.5×12.5	17.2	34.5	12.5	1.5	1.5	80	0.4
CTC-G17.2×Φ34.5×16	17.2	34.5	16	1.5	1	90	0.2
CTC-G17.7×Φ34.5×14.5	17.7	34.5	14.5	1.5	1	80	0.4
CTC-G17.8×Φ39×17	17.8	39	17	2	/	60	0.5
CTC-G17.9×Φ43.5×15.2	17.9	43.5	15.2	1.5	1	60	0.4
CTC-G18×Φ39×17	18	39	17	2	/	60	0.5
CTC-G18.35×Φ43.5×16.2	18.35	43.5	16.2	1.5	1	60	0.4
CTC-G19.9×Φ46.5×17.2	19.9	46.5	17.2	1.5	1	90	0.2
CTC-G20.2×Φ46.5×18.2	20.2	46.5	18.2	1.5	1	90	0.2
CTC-G20.9×Φ46.5×16.2	20.9	46.5	16.2	1.5	1	60	0.4
CTC-G21.35×Φ46.5×17.2	21.35	46.5	17.2	1.5	1	60	0.4
CTC-G22.75×Φ50.5×18.2	22.75	50.5	18.2	1.5	1	60	0.4
CTC-G23.05×Φ50.5×19.2	23.05	50.5	19.2	1.5	1	60	0.4
CTC-G25.75×Φ55.5×20.3	25.75	55.5	20.3	1.5	1	60	0.4
CTC-G26.05×Φ55.5×21.2	26.05	55.5	21.2	1.5	1	60	0.4
CTC-G28.6×Φ60.5×23	28.6	60.5	23	2	2	30	0.5



续表

单位: mm

代号	S	D	H	h	e	a	r
CTC-G29.1×Φ60.5×23	29.1	60.5	23	2	2	30	0.5
CTC-G30×Φ58×32	30	58	32	2	2	30	0.5
CTC-G30×Φ60.5×25	30	60.5	25	3	1.5	80	0.4
CTC-G30.8×Φ60.5×25	30.8	60.5	25	3	2	80	0.4
CTC-G31×Φ61×20	31	61	20	2	2	30	0.5
CTC-G31×Φ61×25	31	61	25	2	2	30	0.5
CTC-G31×Φ61×28	31	61	28	2	2	30	0.5
CTC-G31.2×Φ60.5×27.5	31.2	60.5	27.5	3	2.5	80	0.4
CTC-G31.2×Φ60.5×29	31.2	60.5	29	2	2	60	0.5
CTC-G31.5×Φ60.5×25	31.5	60.5	25	2	2	60	0.5
CTC-G32.3×Φ70.5×60	32.3	70.5	60	3	2	80	0.4
CTC-G33.5×Φ65.5×25	33.5	65.5	25	3	2.5	80	0.4
CTC-G34×Φ65.5×25	34	65.5	25	3	2.5	80	0.4
CTC-G34.2×Φ70.5×31	34.2	70.5	31	2	2	30	0.5
CTC-G34.6×Φ65.5×27.5	34.6	65.5	27.5	3	2.5	80	0.4
CTC-G34.9×Φ70.5×31	34.9	70.5	31	2	2	30	0.5
CTC-G35.25×Φ70.5×60	35.25	70.5	60	3	2.5	80	0.4
CTC-G36×Φ64×35	36	64	35	2	2	30	0.5
CTC-G37.8×Φ75.5×28	37.8	75.5	28	3	2.5	80	0.4
CTC-G38.9×Φ75.5×28	38.9	75.5	28	3	2.5	80	0.4
CTC-G39.6×Φ75.5×30.5	39.6	75.5	30.5	3	2.5	30	0.5
CTC-G39.6×Φ80.5×35	39.6	80.5	35	2	2	30	0.5
CTC-G39.9×Φ80.5×37	39.9	80.5	37	2	2	30	0.5
CTC-G40.25×Φ75.5×60	40.25	75.5	60	3	2.5	80	0.4
CTC-G42.75×Φ80.5×32	42.75	80.5	32	3	2.5	80	0.4
CTC-G43.8×Φ85.5×39	43.8	85.5	39	2	2	30	0.5
CTC-G43.9×Φ80.5×32	43.9	80.5	32	3	2.5	80	0.4
CTC-G44.5×Φ80.5×34.5	44.5	80.5	34.5	3	2.5	80	0.4
CTC-G44.6×Φ85.5×37	44.6	85.5	37	2	2	30	0.5
CTC-G45.25×Φ80.5×60	45.25	80.5	60	3	2.5	80	0.4

根据尺寸范围不同, 模具毛坯内径公差为-2.0~0, 弯曲度要求不大于0.55, 外径、高度公差为-1.3~+1.4, 详情请咨询。