




钨钢车削刀片-T3KA (B)型

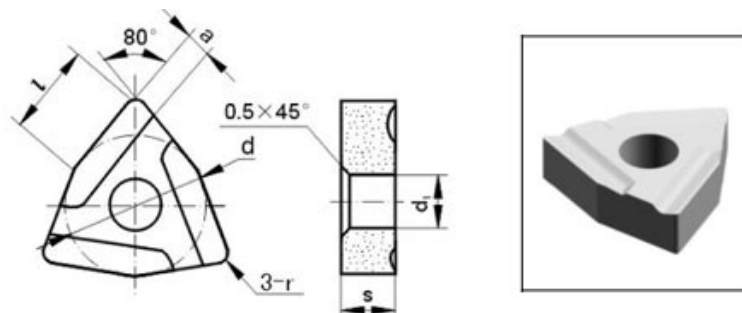

单位: mm

代号	d	s	d1	r	a	l
CTC-GT3K1003A2	10	3.5	2.5	4.2	2.0	6.7
CTC-GT3K1305A3	13	4.5	3.0	5.2	3.0	8.9
CTC-GT3K1305A4	13	4.5	3.5	5.2	4.5	8.9
CTC-GT3K1605A3	16	5.5	4.5	6.2	3.0	11.0
CTC-GT3K1605A4	16	5.5	5.5	6.2	4.5	11.0
CTC-GT3K1610A3	16	5.5	7.0	6.2	3.0	11.0
CTC-GT3K1610A4	16	5.5	8.5	6.2	4.5	11.0
CTC-GT3K1905A4	19	7.0	6.0	7.2	4.5	13.0
CTC-GT3K1905A5	19	7.0	9.5	7.2	5.5	13.0
CTC-GT3K1910A3	19	7.0	8.0	7.2	3.0	13.0
CTC-GT3K1910A4	19	7.0	10.5	7.2	4.5	13.0
CTC-GT3K1910A5	19	7.0	8.0	7.2	5.5	13.0
CTC-GT3K1003B2	10	3.5	2.5	4.2	2.0	6.7
CTC-GT3K1305B3	13	4.5	3.0	5.2	3.0	8.9
CTC-GT3K1305B4	13	4.5	3.5	5.2	4.5	8.9
CTC-GT3K1605B3	16	5.5	4.5	6.2	3.0	11.0
CTC-GT3K1605B4	16	5.5	5.5	6.2	4.5	11.0
CTC-GT3K1610B3	16	5.5	7.0	6.2	3.0	11.0
CTC-GT3K1610B4	16	5.5	8.5	6.2	4.5	11.0
CTC-GT3K1905B4	19	7.0	6.0	7.2	4.5	13.0
CTC-GT3K1905B5	19	7.0	9.5	7.2	5.5	13.0
CTC-GT3K1910B3	19	7.0	8.0	7.2	3.0	13.0
CTC-GT3K1910B4	19	7.0	10.5	7.2	4.5	13.0
CTC-GT3K1910B5	19	7.0	8.0	7.2	5.5	13.0

根据尺寸范围不同, 刀片毛坯内径公差为 ± 0.20 , 厚度公差为 ± 0.30 ,
内切圆、宽度、高度公差为 ± 0.50 , 详情请咨询。