




双螺旋孔钨钢棒材(30°)

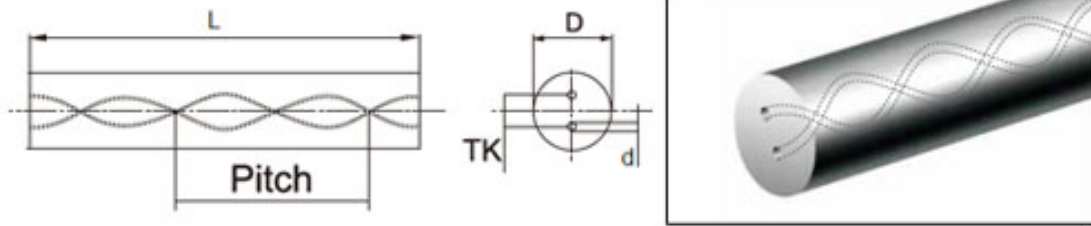

单位: mm

| 代号 | D | TK | d | L | Pitch |
|---------------------------|------|------|------|-----|--------|
| CTC-BΦ6.3×2Φ0.7×2.6×330 | 6.3 | 2.6 | 0.7 | 330 | 32.65 |
| CTC-BΦ8.3×2Φ1.0×4.0×330 | 8.3 | 4 | 1 | 330 | 43.53 |
| CTC-BΦ9.3×2Φ1.4×4.8×330 | 9.3 | 4.8 | 1.4 | 330 | 48.97 |
| CTC-BΦ10.3×2Φ1.4×4.8×330 | 10.3 | 4.8 | 1.4 | 330 | 54.41 |
| CTC-BΦ11.3×2Φ1.4×5.3×330 | 11.3 | 5.3 | 1.4 | 330 | 59.86 |
| CTC-BΦ12.3×2Φ1.4×6.25×330 | 12.3 | 6.25 | 1.4 | 330 | 65.3 |
| CTC-BΦ13.3×2Φ1.75×6.5×330 | 13.3 | 6.5 | 1.75 | 330 | 70.74 |
| CTC-BΦ14.3×2Φ1.75×7.1×330 | 14.3 | 7.1 | 1.75 | 330 | 76.18 |
| CTC-BΦ15.3×2Φ1.75×7.7×330 | 15.3 | 7.7 | 1.75 | 330 | 81.62 |
| CTC-BΦ16.3×2Φ1.75×8.3×330 | 16.3 | 8.3 | 1.75 | 330 | 87.06 |
| CTC-BΦ18.3×2Φ2.0×9.55×330 | 18.3 | 9.55 | 2 | 330 | 97.95 |
| CTC-BΦ20.3×2Φ2.0×10.4×330 | 20.3 | 10.4 | 2 | 330 | 108.83 |

根据尺寸范围不同, 外径公差为0~+0.5, 孔间距公差为-1.0~0, 冷却孔公差为±0.25, 螺距公差为-0.65~+2.23, 30°±0.5°, 详情请咨询。