




双直孔钨钢棒材

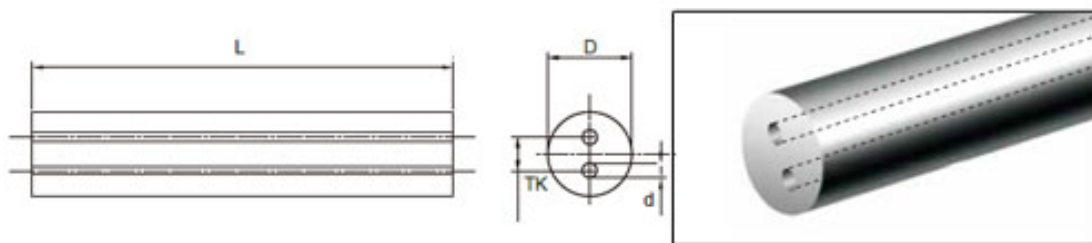

单位: mm

代号	D	TK	d	L
CTC-BΦ4.3×2Φ0.8×1.8×330	4.3	1.8	0.80	330
CTC-BΦ5.3×2Φ0.8×2.0×330	5.3	2.0	0.80	330
CTC-BΦ6.3×2Φ1.0×3.0×330	6.3	3.0	1.00	330
CTC-BΦ7.3×2Φ1.0×3.5×330	7.3	3.5	1.00	330
CTC-BΦ8.3×2Φ1.0×4.0×330	8.3	4.0	1.00	330
CTC-BΦ9.3×2Φ1.4×4.0×330	9.3	4.0	1.40	330
CTC-BΦ10.3×2Φ1.4×5.0×330	10.3	5.0	1.40	330
CTC-BΦ11.3×2Φ1.4×5.0×330	11.3	5.0	1.40	330
CTC-BΦ12.3×2Φ1.75×6.0×330	12.3	6.0	1.75	330
CTC-BΦ13.3×2Φ1.75×6.0×330	13.3	6.0	1.75	330
CTC-BΦ14.3×2Φ1.75×7.0×330	14.3	7.0	1.75	330
CTC-BΦ15.3×2Φ2.0×7.0×330	15.3	7.0	2.00	330
CTC-BΦ16.3×2Φ2.0×8.0×330	16.3	8.0	2.00	330
CTC-BΦ17.3×2Φ2.0×8.0×330	17.3	8.0	2.00	330
CTC-BΦ18.3×2Φ2.0×9.0×330	18.3	9.0	2.00	330
CTC-BΦ19.3×2Φ2.0×9.0×330	19.3	9.0	2.00	330
CTC-BΦ20.3×2Φ2.5×10.0×330	20.3	10.0	2.50	330

根据尺寸范围不同, 外径公差为0~+0.5, 孔间距公差为-0.8~0, 冷却孔公差为±0.25, 长度公差为0~+5, 详情请咨询。